



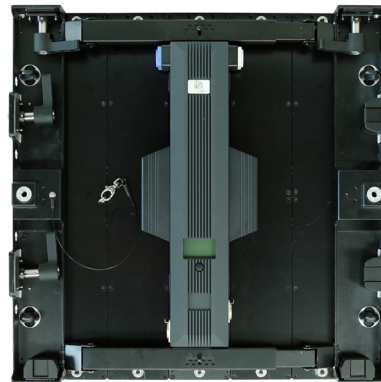


22,5° BENDABLE  
HIGH-BRIGHTNESS  
HIGH-CONTRAST  
BLACK-FACE  
QUICK-LOCK-SYSTEM  
MAGNETIC FAST-RIGG

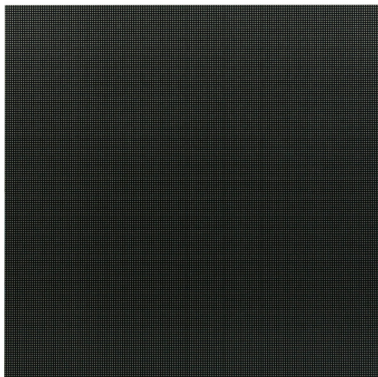

<b>Pixelpitch</b>	2,9 mm
<b>Helligkeit</b>	1.000 nit
<b>SMD-Typ</b>	Nationstar 2121 3-in-1 RGB
<b>SMD Merkmale</b>	Black-Face, High-Brightness, High-Contrast
<b>Farbtiefe</b>	14 Bit (18 Bit + Modus, 22 Bit Image Booster)
<b>Auflösung</b>	168 x 168 Pixel
<b>Modul Biegbarkeit</b>	max. 22,5°
<b>LED Treiberchip</b>	MBI5153
<b>Receivingcard</b>	A8S
<b>Scantyp</b>	1/14
<b>Refreshrate</b>	≥ 3840 Hz
<b>Horiz. Blickwinkel</b>	+140°/-140°
<b>Vert. Blickwinkel</b>	+140°/-140°
<b>Kontrast</b>	5.000:1
<b>Nennleistung</b>	Typisch 55 W / max. 175 W
<b>Spannungsbereich</b>	AC 88-264V/ 50-60 Hz
<b>Stromanschluss</b>	Neutrik powerCON
<b>Abmessungen</b>	500 x 500 x 70 mm (BxHxT)
<b>Gewicht</b>	6,5 kg
<b>IP Klasse</b>	IP30
<b>Temperaturbereich</b>	Im Betrieb: -30°C bis + 45°C Lagernd: -20°C bis + 65°C
<b>Produkthighlights</b>	22,5° Bendable, Quick-Lock-System, Magnetic Fast-Rigg
<b>Zertifizierungen</b>	   EMC