



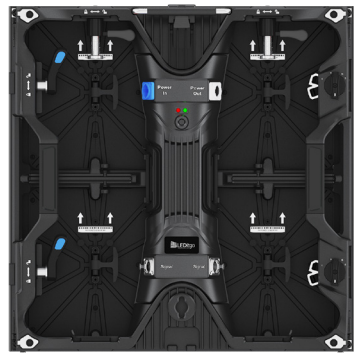


vP2+ Novastar | Virtual Production Series

Technisches Datenblatt

NOVASTAR A8S RECEIVINGCARD
 -8° to +8° CONCAVE
 HIGH-LEVEL
 BLACK-FACE
 QUICK-LOCK-SYSTEM
 MAGNETIC FAST-RIGG
 FAST REPLACEABLE BACKBOX

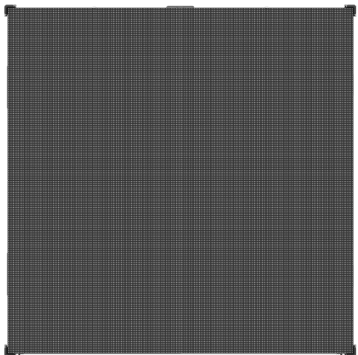

Pixelpitch	2,6 mm
Helligkeit	1.200 nits
SMD-Typ	Nationstar LIGBF1515RGBA-HF
SMD Merkmale	Black-Face, High-Level
Farbtiefe	16 Bit
Auflösung	192 x 192 Pixel
LED Treiberchip	MBI5264
Receivingcard	Novastar A8S
Scantyp	1/24
Refreshrate	≥ 3.840 Hz
Horiz. Blickwinkel	+85°/-85°
Vert. Blickwinkel	+85°/-85°
Kontrast	> 5.500:1
Nennleistung	Typisch 44 W / max. 130 W
Spannungsbereich	AC 88-264V/ 50-60 Hz
Stromanschluss	Neutrik powerCON
Abmessungen	500 x 500 x 80 mm (BxHxT)
Gewicht	8,5 kg
IP Klasse	IP40
Temperaturbereich	Im Betrieb: -30°C bis + 45°C Lagernd: -10°C bis + 55°C
EMV-Klasse	A
Produkthighlights	-8° to +8° Concave Installation, Magnetic Fast-Rigg, Fast Replacable Backbox
Zertifizierungen	   EMC