


# eX3T

## Technisches Datenblatt

500 x 500 mm

NOVASTAR A8S-N RECEIVINGCARD  
 QUICK-LOCK-SYSTEM  
 MAGNETIC FAST-RIGG  
 FRONT- & REARSERVICE  
 -10° AND +10° CURVEABLE

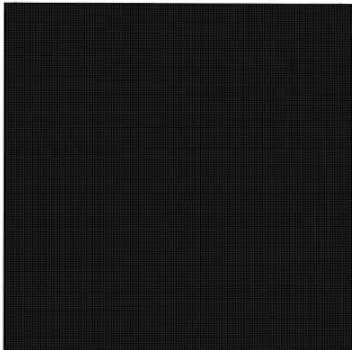

<b>Pixelpitch</b>	3,90 mm
<b>Helligkeit</b>	1.100 nit
<b>Gewicht</b>	5,4 kg
<b>Nennleistung</b>	Typisch 34 W   max. 150 W
<b>SMD-Typ</b>	Nationstar 2020
<b>SMD Merkmale</b>	High-Level, Black-Face
<b>Farbtiefe</b>	14 Bit
<b>Auflösung</b>	128 x 128 px
<b>LED Treiberchip</b>	MBI5253
<b>Receivingcard</b>	Novastar A8s-N
<b>Scantyp</b>	1/16
<b>Refreshrate</b>	≥ 3.840 Hz
<b>Horiz. Blickwinkel</b>	+140°   -140°
<b>Vert. Blickwinkel</b>	+140°   -140°
<b>Kontrast</b>	> 7.800:1
<b>Spannungsbereich</b>	AC 100-240V   50 Hz
<b>Stromanschluss</b>	Seetronic
<b>Abmessungen (BxHxT)</b>	500 x 500 mm   T=40 mm
<b>IP Klasse</b>	IP 40 (Front & Back)
<b>Temperaturbereich</b>	-15°C bis +40°C (Im Betrieb) -20°C bis +45°C (Lagernd)
<b>Produkthighlights</b>	Quick-Lock-System, Magnetic Fast-Rigg 100% Front- & Backservice

### Zertifizierungen



Stand: 06/2023