




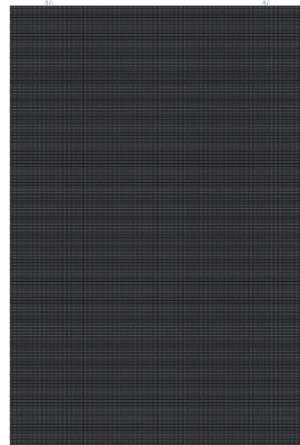

aR-4,8

Technisches Datenblatt

500 x 750 mm

HIGH BRIGHTNESS
HIGH-CONTRAST
LIGHT WEIGHT
100% FRONT- AND BACKSERVICE



| | |
|----------------------------|---|
| Pixelpitch | 4,81 mm |
| Helligkeit | 5.000 nit |
| Gewicht | 10 kg |
| Nennleistung | Typisch 105 W max. 400 W |
| SMD-Typ | SMD1820 3-in-1 GW |
| SMD Merkmale | High-Brightness, High-Contrast, High-Level |
| Farbtiefe | Bis zu 14 Bit |
| Auflösung | 104 x 156 px |
| LED Treiberchip | ICN2153 |
| Receivingcard | AT32 |
| Scantyp | 1/8 |
| Refreshrate | ≥ 3.840 Hz |
| Horiz. Blickwinkel | +140° -140° |
| Vert. Blickwinkel | +140° -140° |
| Kontrast | > 4.000:1 |
| Spannungsbereich | AC 110-220V 50 / 60 Hz |
| Stromanschluss | Direktverkabelung |
| Abmessungen (BxHxT) | 500 x 750 mm T= 74 mm |
| IP Klasse | IP65 Front IP54 Back |
| Temperaturbereich | -20°C bis +50°C (Im Betrieb) -20°C bis +50°C (Lagernd) |
| Produkthighlights | Light Weight, 100% Front- und Backservice |
| Zertifizierungen |     |