


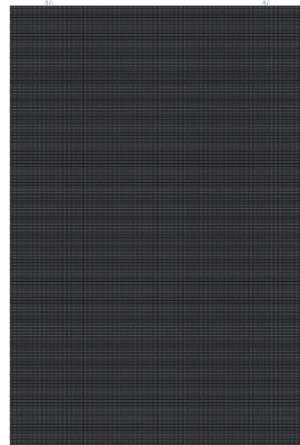


# aR-7,8

## Technisches Datenblatt

500 x 750 mm

HIGH BRIGHTNESS  
HIGH-CONTRAST  
LIGHT WEIGHT  
100% FRONT- AND BACKSERVICE



<b>Pixelpitch</b>	7,81 mm
<b>Helligkeit</b>	7.000 nit
<b>Gewicht</b>	10 kg
<b>Nennleistung</b>	Typisch 105 W   max. 400 W
<b>SMD-Typ</b>	SMD2727 3-in-1 GW
<b>SMD Merkmale</b>	High-Brightness, High-Contrast, High-Level
<b>Farbtiefe</b>	Bis zu 14 Bit
<b>Auflösung</b>	64 x 96 px
<b>LED Treiberchip</b>	ICN2038S
<b>Receivingcard</b>	AT32
<b>Scantyp</b>	1/4
<b>Refreshrate</b>	≥ 1.920 Hz
<b>Horiz. Blickwinkel</b>	+140°   -140°
<b>Vert. Blickwinkel</b>	+140°   -140°
<b>Kontrast</b>	> 4.000:1
<b>Spannungsbereich</b>	AC 110-220V   50 / 60 Hz
<b>Stromanschluss</b>	Direktverkabelung
<b>Abmessungen (BxHxT)</b>	500 x 750 mm   T= 74 mm
<b>IP Klasse</b>	IP65 Front   IP54 Back
<b>Temperaturbereich</b>	-20°C bis +50°C (Im Betrieb) -20°C bis +50°C (Lagernd)
<b>Produkthighlights</b>	Light Weight, 100% Front- und Backservice
<b>Zertifizierungen</b>	   EMC