


truckLED 3 Portrait

Technisches Datenblatt

TRUCK OPTIMIZED
FRONT- & BACKSERVICE
HIGH-BRIGHTNESS
HIGH-CONTRAST
FULL BLACK-FACE
QUICK-LOCK-SYSTEM

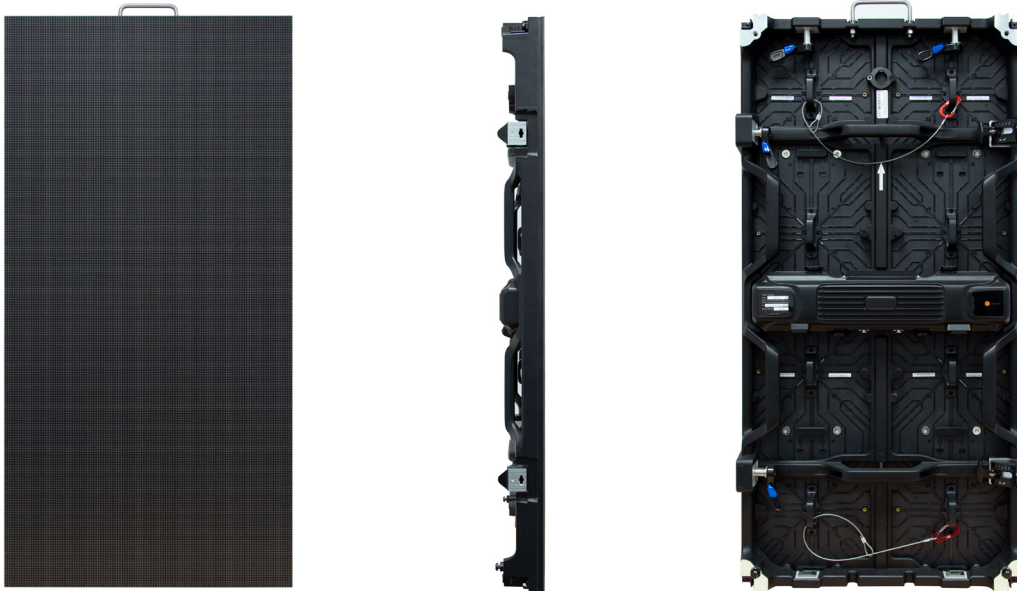

| | |
|---------------------------|---|
| Pixelpitch | 3,9 mm |
| Helligkeit | 5.000 nit |
| SMD-Typ | Nationstar 1921 Gold Wire |
| SMD Merkmale | Black-Face, High-Brightness, High-Contrast |
| Farbtiefe | 14 Bit pro Farbkanal |
| Auflösung | 128 x 256 Pixel |
| LED Treiberchip | MBI5252 |
| Receivingcard | A5S |
| Scantyp | 1/14 |
| Refreshrate | ≥ 3840 Hz |
| Horiz. Blickwinkel | +140°/-140° |
| Vert. Blickwinkel | +120°/-120° |
| Kontrast | 6.200:1 |
| Nennleistung | Typisch 140 W / max. 400 W |
| Spannungsbereich | AC 88-264V/ 50-60 Hz |
| Stromanschluss | Neutrik powerCON TRUE1 |
| Abmessungen | 500 x 1.000 mm (BxH) |
| Gewicht | 13,2 kg |
| IP Klasse | IP65 vorne / IP54 hinten |
| Temperaturbereich | Im Betrieb: -20°C bis + 50°C Lagernd: -10°C bis + 60°C |
| Produkthighlights | Truck Optimized, Front- & Backservice, High-Brightness, High-Contrast, Full Black-Face, Quick-Lock-System |
| Zertifizierungen |    EMC |