


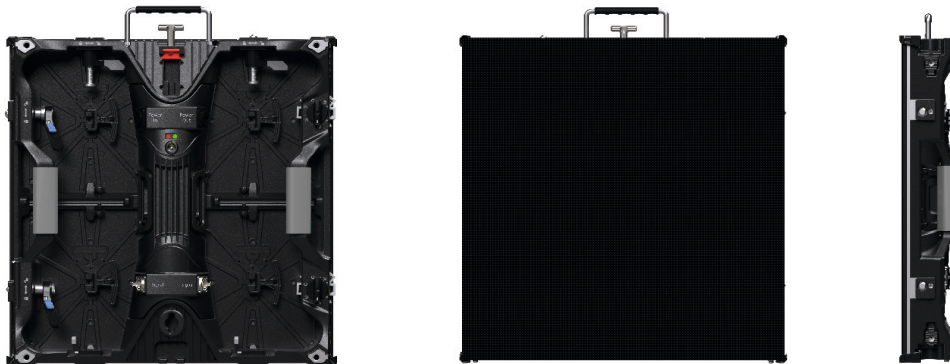

# vP2+B V2

## Technisches Datenblatt

500 x 500 mm

BROMPTON R2 RECEIVINGCARD  
COLOR MATCHING TOOL  
1-6° CONCAVE  
HIGH-LEVEL  
BLACK-FACE  
QUICK-LOCK-SYSTEM  
MAGNETIC FAST-RIGG  
FAST REPLACEABLE BACKBOX



<b>Pixelpitch</b>	2,60 mm
<b>Helligkeit</b>	≥ 1.200 nits
<b>Gewicht</b>	8,5 kg
<b>Nennleistung</b>	Typisch 44 W   max. 130 W
<b>SMD-Typ</b>	LEDitgo BF1515
<b>SMD Merkmale</b>	Black-Face, High-Level
<b>Farbtiefe</b>	Bis zu 16 Bit
<b>Auflösung</b>	192 x 192 px
<b>LED Treiberchip</b>	MBI5264
<b>Receivingcard</b>	Brompton R2
<b>Scantyp</b>	1/24
<b>Refreshrate</b>	≥ 3.840 Hz
<b>Horiz. Blickwinkel</b>	+140°   -140°
<b>Vert. Blickwinkel</b>	+140°   -140°
<b>Kontrast</b>	> 5.500:1
<b>Spannungsbereich</b>	AC 88-264V   50-60 Hz
<b>Stromanschluss</b>	Neutrik powerCON TRUE1 TOP
<b>Abmessungen (BxHxT)</b>	500 x 500 mm   T = 80 mm
<b>IP Klasse</b>	IP 40 Front & Back
<b>Temperaturbereich</b>	-30°C bis +45°C (Im Betrieb) -10°C bis +55°C (Lagernd)
<b>Produkthighlights</b>	1-6° Konkave Installation, Color Matching Tool, Magnetic Fast-Rigg, Fast Replacable Backbox
<b>Zertifizierungen</b>	   EMC